

# Rental Power 800 kW



## > Specification sheet

Our energy working for you.™



### Description

This Cummins Power Generation rental package is a fully integrated mobile power generation system, providing optimum performance, reliability, and versatility for standby and prime power applications.

The package utilizes custom designed switchgear to meet severe customer requirements. This switchgear provides reconnectable voltage via a link board design, automatic start/stop control and easy connection to existing installations.

### Features

#### Cummins diesel engines

- Rugged 4-cycle industrial diesel delivers reliable power and fast response to load changes.
- Equipped with heavy duty air cleaners, bypass-type oil filters and dual-element fuel/water separator filtration system with 4-way valve.
- Includes jacket water heaters for more reliable operation in emergency standby applications.

#### Control system

- The most advanced, reliable, and capable generator set control system available in the market today.
- Integrated generator set providing precise frequency and voltage regulation, alarm and status message display in one easy-to-operate customer interface.

- Remote monitoring and operation ready.
- Auto shutdown at fault detection.

#### Stamford alternators

- Designed and built by Cummins Generator Technologies.
- Voltage - 480/208 VAC standard (600 VAC optional).
- Alternators designed for improved motor starting.
- Permanent magnet excitation for improved performance in cyclic and non-linear load applications.

#### Rental package enclosure

- Designed for serviceability access.
- Optimized fuel capacity.
- Fluid containment design for greater environmental protection.
- Sound attenuated to minimize impact on local environment.
- Vertical cooling air and engine exhaust path to minimize sound level adjacent to the container.
- Equipped with 24 VDC lighting.
- Unit has paralleling capabilities at 480 and 600 VAC only.
- Utility grade breaker.

Shore power 100 amp service breaker panel – single phase 120/240 VAC: (1) 30 amp breaker – 240 VAC (26.75 amp = 6420 watts for the heater). (1) 15 amp breaker – 120 VAC (GFIs), (1) 15 amp breaker – 120 VAC (battery charger).

Model	Voltages (V)	Standby rating		Prime rating		Engine model	Alternator model	Generator Specification sheet number
		60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)			
<b>C800D6RG-7211</b>	<b>208/480</b>	<b>800</b> (1000)		<b>725</b> (906)		QSK23-G7	HCI634H	S-1551
<b>C800D6RG 600V</b>	<b>600</b>	<b>800</b> (1000)		<b>725</b> (906)		QSK23-G7	HCI634J	S-1551

## Generator set specifications

Governor regulation class	ISO8528 Part 1 Class G3
Voltage regulation, no load to full load	±0.5%
Random voltage variation	±0.5%
Frequency regulation	Isochronous
Random frequency variation	±0.25%
Radio frequency interference	IEC 801.2, through IEC 801.5, MIL STD 461C, Part 9

## Engine specifications

Engine model	QSK23-G7
Engine data sheet	DS-50047
EPA Nonroad	Tier II
Design	4 cycle, in-line, turbocharged and low temperature after-cooled
Bore	170 mm (6.69 in.)
Stroke	170 mm (6.69 in.)
Displacement	23.15 liters (1413 in <sup>3</sup> )
Cylinder block	Cast iron, in-line, 6 cylinder
Battery capacity	8D (qty: 4) 1250 CCA @ 0 °F and 1500 CCA @ 32 °F
Battery charging alternator	24 volt 35 amp Delco Remy
Starting voltage	24 volt, negative ground
Fuel system	Direct injection: number 2 diesel fuel
Fuel filter	Spin on fuel filters with water separator. Additional Fleetguard Industrial Pro Pre-filters
Air cleaner type	2-stage dry replaceable element with dust ejectors (qty: 2)
Lube oil filter type(s)	Dual venturi spin-on, combination full-flow and bypass filters
Oil capacity	102 L (108 qt)
Standard cooling system	122 °F (50 °C)

## Alternator specifications

Alternator data sheet	ADS-310 (208/480 VAC), ADS-311 (600 VAC optional)
Design	Brushless, 4-pole, revolving field
Stator	Double layer lap 2/3 pitch
Rotor	Single bearing, flexible disc
Insulation system	Class H per NEMA MG1-1.65 (208/480 VAC), Class H per NEMA MG1-1.65 (600 VAC optional)
Standard temperature rise	125/40 °C standby (208/480 VAC), 125/40 °C standby (600 VAC optional)
Exciter type	PMG (Permanent Magnet Generator)
Phase rotation	A (U), B (V), C (W)
Alternator cooling	Direct drive centrifugal fan
AC waveform total harmonic distortion	< 5% no load to full linear load, < 3% for any single harmonic
Telephone influence factor (TIF)	< 50 per NEMA MG1-22.43
Telephone harmonic factor (THF)	< 3

## Power capability specifications

	Standby rating			
	240 V, 1 phase amps	208 V, 3 phase amps	480 V, 3 phase amps	600 V, 3 phase amps
<b>C800D6RG</b>		2776	1203	962

## Electrical power panel specifications

Model voltage	120 V duplex receptacles	240 V twist	Load lug connection (stud diameter)	Load lug circuit breakers
<b>208/480 V</b>	2 (20 amp)		½	3000 amp
<b>600V</b>	2 (20 amp)		½	1000 amp

## Site derating factors

Standby application: The engine may be operated at 1800 rpm up to 3730 ft (1137 m) and 104 °F (40 °C) without power deration. For sustained operation above the conditions, derate by 4.4% per 1000 ft (305 m) and 10% per 18 °F (10 °C).

## Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand is a registered trademark of Cummins Power Generation Inc. "Our energy working for you." and "The Power of One" are trademarks of Cummins Power Generation.  
S-1594d (1/09)



## Control system

### PowerCommand control with AmpSentry™ protection

- Integrated automatic voltage regulator and engine speed governor
- AmpSentry protection guards the electrical integrity of the alternator and power system from the effects of overcurrent, over/under voltage, under frequency and overload conditions
- Control components designed to withstand the vibration levels typical in generator sets

### Standard control description

- Analog % of current meter (amps)
- Analog AC frequency meter
- Analog AC voltage meter
- Analog % of load meter (kW)
- Cycle cranking control
- Digital display panel
- Emergency stop switch
- Idle mode control
- Menu switch
- Panel backlighting
- Remote starting, 12 volt, 2 wire
- Reset switch
- Run-off-auto switch
- Sealed front panel, gasketed door
- Self diagnostics
- Voltmeter/ammeter phase selector switch

### Standard performance data warnings

- High coolant temperature
- High DC voltage
- Low coolant temperature
- Low DC voltage
- Low oil pressure
- Over current
- Overload load shed contacts
- Up to four customer fault inputs
- Weak battery
- Overflow
- Overspeed
- Short circuit
- Underfrequency

### Standard protection functions

- Voltmeter/ammeter phase selector
- Warnings
- High Coolant Temperature
- High DC Voltage
- Low Coolant Temperature
- Low DC Voltage
- Low Oil Pressure
- Over Current
- Overload Load Shed Contacts
- Up to Four Customer Fault Inputs
- Weak Battery
- Overflow

### Shutdowns

- Emergency stop
- Fail to crank
- High AC voltage
- High coolant temperature
- Low coolant level
- Low AC voltage
- Low oil pressure
- Overcurrent
- Overspeed
- Short circuit
- Underfrequency



Optional features shown

**Our energy working for you.™**

[www.cumminspower.com](http://www.cumminspower.com)

©2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand is a registered trademark of Cummins Power Generation Inc. "Our energy working for you." and "The Power of One" are trademarks of Cummins Power Generation.  
S-1594d (1/09)




## Ratings definitions

### Standby:

Applicable for supplying emergency power for the duration of normal power interruption. No sustained overload capability is available for this rating. (Equivalent to Fuel Stop Power in accordance with ISO3046, AS2789, DIN6271 and BS5514). Nominally rated.

### Prime (unlimited running time):

Applicable for supplying power in lieu of commercially purchased power. Prime power is the maximum power available at a variable load for an unlimited number of hours. A 10% overload capability is available for limited time. (Equivalent to Prime Power in accordance with ISO8528 and Overload Power in accordance with ISO3046, AS2789, DIN6271, and BS5514).

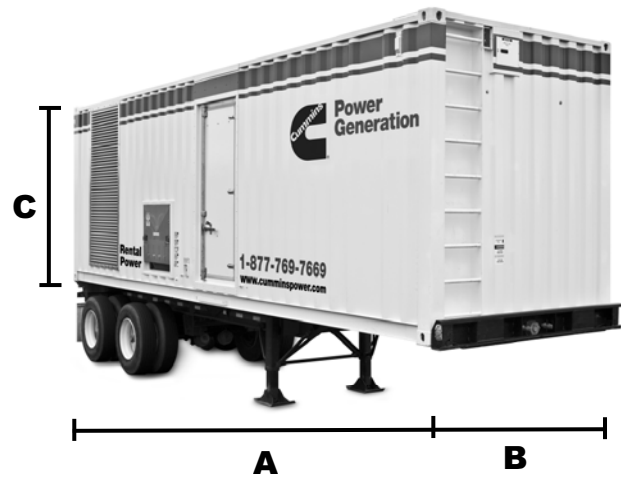

## Dimensions

Model	Dim "A" mm (in.)	Dim "B" mm (in.)	Dim "C" mm (in.)	Weight w/o fuel kg (lbs)	Weight with fuel kg (lbs)	Fuel capacity liters (gal)
<b>C800D6RG</b>	<b>9119</b> (359)	<b>2438</b> (96)	<b>2896</b> (114)	<b>15223</b> (33492)	<b>20432</b> (44951)	<b>6110</b> (1614)

**Note: Weight and dimensions do not include optional chassis.**

## Fuel consumption

60 Hz Ratings, kW (kVA)	Load	Standby 800 (1000)				Prime 725 (906)			
		1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
	US Gal/hr	17	29	41	53	15.5	27.5	38	48
	L/hr	64.4	109.8	155.2	200.6	58.7	104.1	143.8	181.7

## Specifications

Model	KW rating		Sound level at full load dB(A) @ 7 m	Tier rating	Hours of operation (75% load)	
	Standby	Prime			Standby	Prime
<b>C800D6RG</b>	800	725	79	Tier II	36	39

## Accessories

Ladder	Part Number
Fueling Ladder	0410-1372
Access Ladder*	0410-1371
Folding Ladder	0410-1362

\* One access ladder provided with purchase of unit

## Certifications

**Below certifications are for generator set only**



This generator set is designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.



The Prototype Test Support (PTS) program verifies the performance integrity of the generator set design. Cummins Power Generation products bearing the PTS symbol meet the prototype test requirements of NFPA 110 for Level 1 systems.



All low voltage models are CSA certified to product class 4215-01.




The generator set is available Listed to UL 2200, Stationary Engine Generator Assemblies.

## U.S. EPA

Engine certified to U.S. EPA Nonroad Source Emissions Standards, 40 CFR 89, Tier 2.

### Locations:

**Arlington, TX**  
**Austin, TX**  
**Dallas, TX**  
**Fort Worth, TX**  
**Houston, TX**  
**Mesquite, TX**  
**Odessa, TX**  
**Oklahoma City, OK**  
**San Antonio, TX**  
**Tulsa, OK**



**Cummins Southern Plains, LLC**  
**Corporate Office**  
 600 N. Watson RD.  
 Arlington TX, 76011  
 Telephone: 817.640.6801  
 Toll Free: 800.306.6801

**Cummins Southern Plains, LLC**  
**Rental Department**  
 7045 N. Loop 610 East  
 Houston TX, 77028  
 Telephone: 713.679.7750  
 Toll Free: 800.474.7421

[www.cummins-sp.com/rental](http://www.cummins-sp.com/rental)

©2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand is a registered trademark of Cummins Power Generation Inc. "Our energy working for you." and "The Power of One" are trademarks of Cummins Power Generation.  
 S-1594d (1/09)

